

# Extruded Aluminum Louver

**EL79**

2" Deep • Inverted "Y" Horizontal Blade • Sightproof Stationary Louver

**STANDARD CONSTRUCTION**

- FRAME:** .081" thick; 6063-T6/T52 extruded aluminum alloy
- BLADES:** .064" thick; 6063-T6/T52 extruded aluminum alloy
- ASSEMBLY:** Mechanically fastened
- SCREEN:** 1/2" x .051" flattened aluminum birdscreen
- FINISH:** Mill

**OPTIONS**


- Finish - Baked Enamel, Kynar, or Anodize
- Variety of Bird and Insect Screen
- Welded Construction
- Blank-off Panels

**NOTES**


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately 1/2" undercut.
2. Shipping weight approximately 3.8 lbs./sq.ft.

**LOUVER SIZE**

Panels	Min Panel	Max Single Panel
EL79	12"W x 12"H	60"W x 96"H


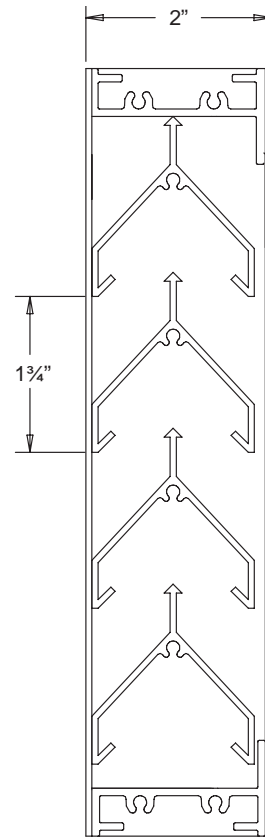


Section View

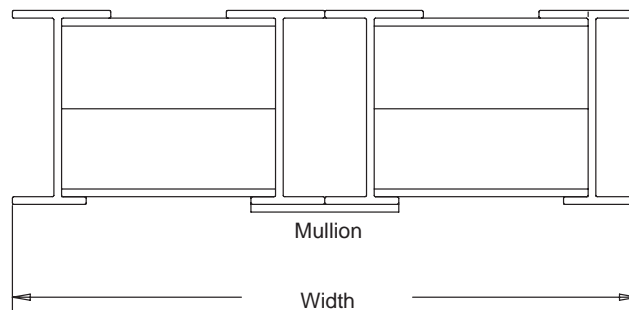

Water Penetration: 850 fpm recommended maximum free area velocity  
 Pressure Drop: 0.40 in.wg at 1000 fpm and 4430 scfm  
 Free Area: 4.43 sq.ft. = 27.7% for 48"W x 48"H test size

Ratings do not include the effect of a birdscreen.

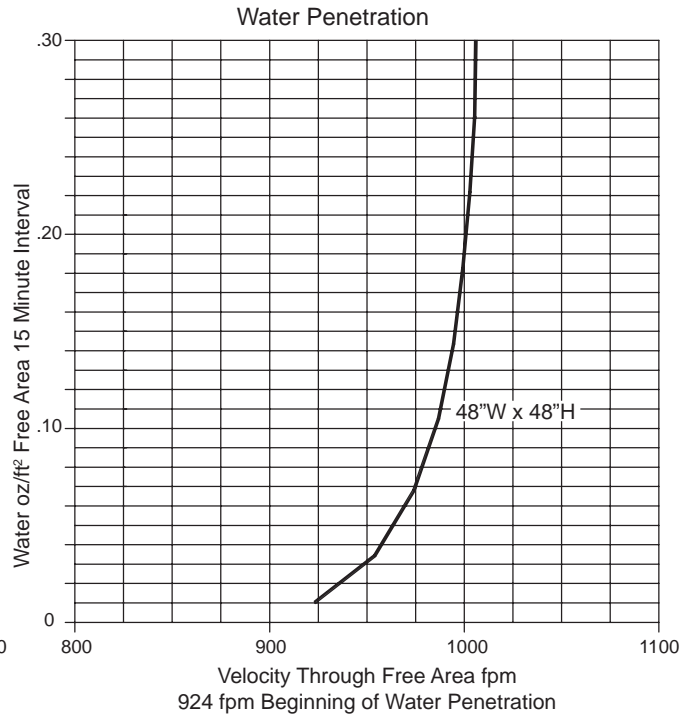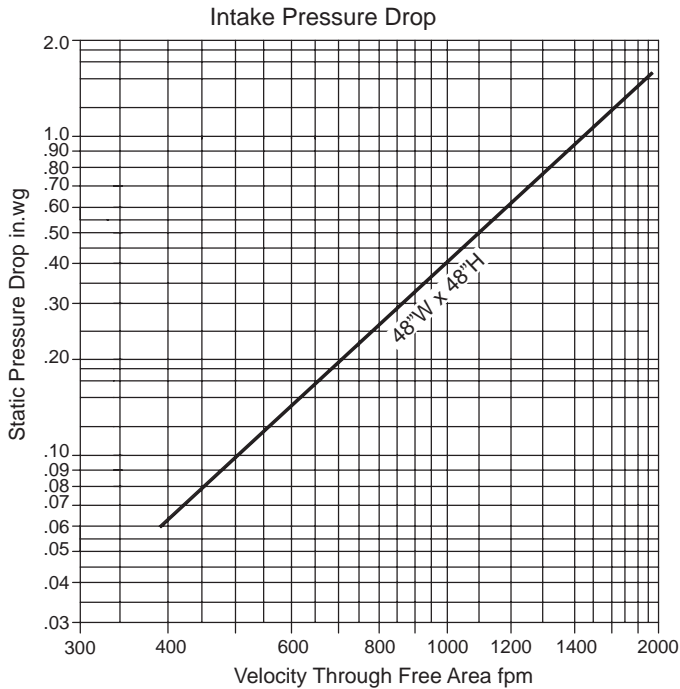

Free Area sq.ft.

		Width								
		12"	18"	24"	30"	36"	42"	48"	54"	60"
Height	12"	0.26	0.42	0.57	0.73	0.88	1.04	1.20	1.35	1.51
	24"	0.50	0.80	1.10	1.40	1.70	2.00	2.30	2.60	2.90
	36"	0.74	1.18	1.63	2.07	2.52	2.96	3.70	3.85	4.29
	48"	0.98	1.57	2.16	2.74	3.33	3.92	4.43	5.10	5.68
	60"	1.22	1.95	2.68	3.42	4.15	4.88	5.61	6.34	7.08
	72"	1.46	2.34	3.21	4.09	4.96	5.84	6.72	7.59	8.47
	84"	1.70	2.72	3.74	4.76	5.78	6.80	7.82	8.84	9.86
	96"	2.02	3.24	4.45	5.67	6.88	8.10	9.31	10.53	11.74