

# Formed Steel Louver

**SL63**

6" Deep • 45° Non-Drainable Blade • Formed Steel Stationary Louver

## STANDARD CONSTRUCTION

- FRAME:** 18-GA galvanized steel channel type
- BLADES:** 18-GA galvanized steel
- ASSEMBLY:** Riveted and/or welded; Full jambs with blades, head and sill contained within
- FINISH:** Mill
- SCREEN:** ½" sq. mesh 19-GA galvanized

## OPTIONS



- Flange Frame
- Extended Sub-Sills (3" or 5")
- Sub-Frame
- Installation Angles
- Stainless Steel, Other Steel Gauges
- Finishes - Baked Enamel, Epoxies
- Variety of Bird and Insect Screens
- Blank-Off Panels

## NOTES


1. "A" width and "B" height are opening dimensions. Louvers are provided approximately ½" undersize.
2. Approximate louver weight is 8½ lbs./sq.ft.

## LOUVER SIZE


Panels	Minimum Panel	Maximum Panel
SL63	12"W x 12"H	60"W x 96"H

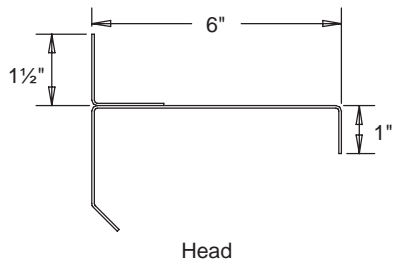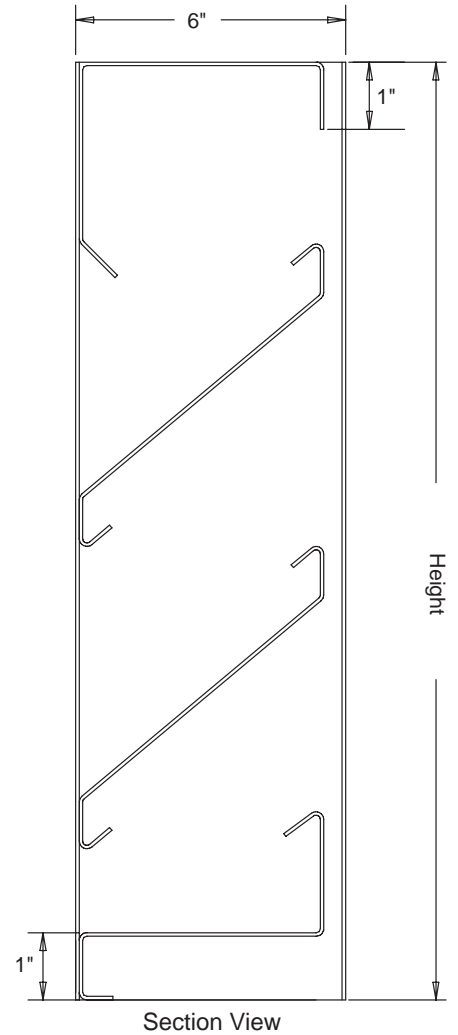


Head

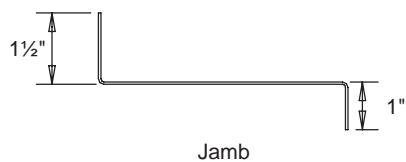

Jamb

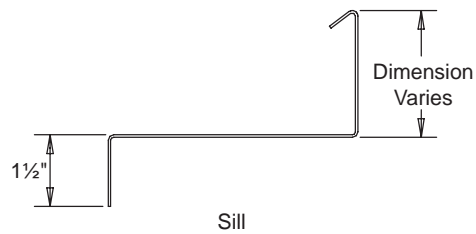

Sill

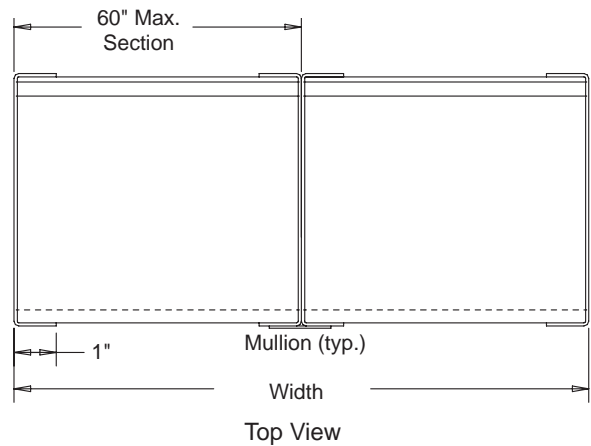

Ratings do not include the effect of birdscreen.

Free Area sq.ft.

		Width								
		12	18	24	30	36	42	48	54	60
Height	12	.19	.31	.42	.53	.65	.76	.88	.99	1.11
	24	.56	.89	1.23	1.56	1.90	2.23	2.57	2.90	3.24
	36	1.05	1.68	2.31	2.94	3.56	4.19	4.82	5.45	6.08
	48	1.61	2.58	3.54	4.51	5.48	6.44	7.41	8.38	9.34
	60	2.17	3.48	4.78	6.09	7.39	8.69	10.00	11.30	12.61
	72	2.71	4.33	5.95	7.58	9.20	10.83	12.45	14.08	15.70
	84	3.17	5.08	6.98	8.89	10.79	12.69	14.60	16.50	18.40
	96	3.54	5.67	7.80	9.92	12.05	14.18	16.30	18.43	20.56