
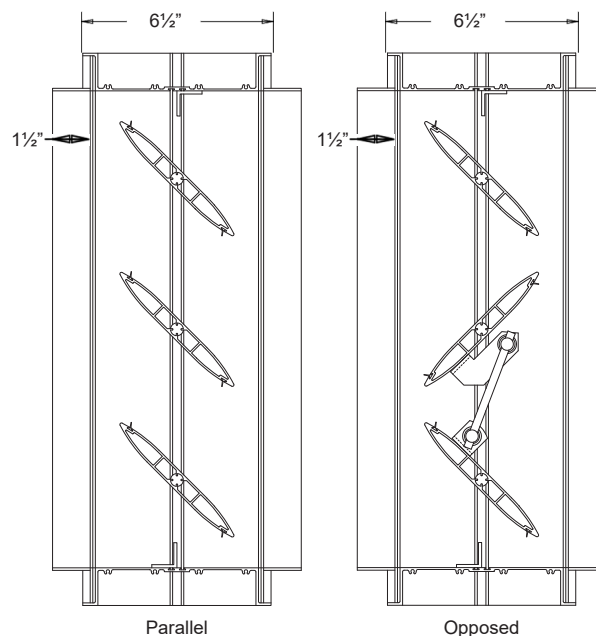
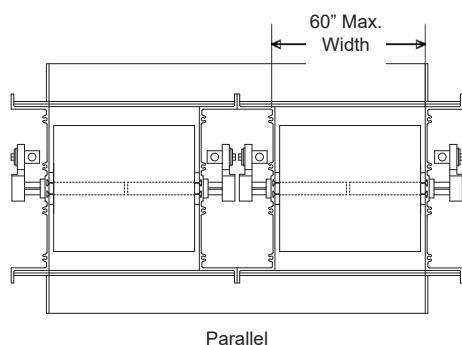


Transition Damper • 6½" Deep • Airfoil Blades • Parallel or Opposed • Round and Oval Transition • Extruded Aluminum**For use to 6 in. w.g. of static pressure****STANDARD CONSTRUCTION****FRAME:** 1½" x 6½" x 1½" extruded aluminum channel frame with a .080" thick (nominal) aluminum transition piece.**BLADE:** Extruded aluminum, airfoil design.**DRIVE SHAFT:** ½" dia. aluminum shaft, extended 7 inches beyond frame.**BEARINGS:** Double-sealed.**LINKAGE:** In jamb, out of air stream.**FINISH:** Mill.**NOTES**


1. ¼" nominal deduction will be made to the opening size given.
2. Please specify blade position: Parallel or Opposed.
3. Approximate shipping weight is 7 lbs./sq.ft.

DAMPER SIZES

Min Size	Max Size
10"W x 10"H	60"W x 60"H

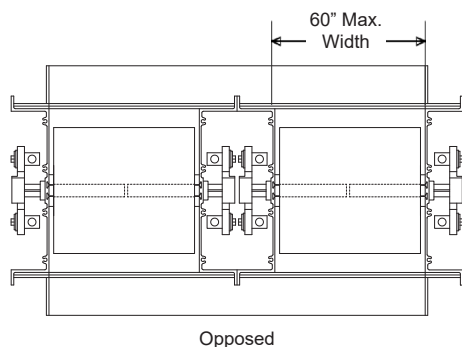

Not to scale.

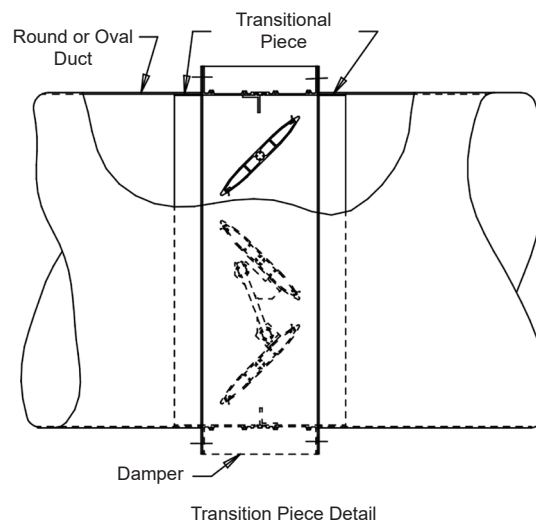

Item #	Qty	Width	Height	Parallel	Opposed	Round	Oval		
		Damper Size (in.)		Blade Position		Transition Type			Union Made
Arch. / Eng.:				EDR:		ECN:		Job:	
Contractor:									
Project:				Date:		DWN:		DWG:	

In the interest of product development, Louvers & Dampers reserves the right to make changes without notice.

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286